


Ytelsene gjelder for sjøvann med en temperaturdifferanse på 6°C mellom varm og kald side.  
 5% margin mot forsmutsning.

### Dimensjoner

(alle mål i mm)

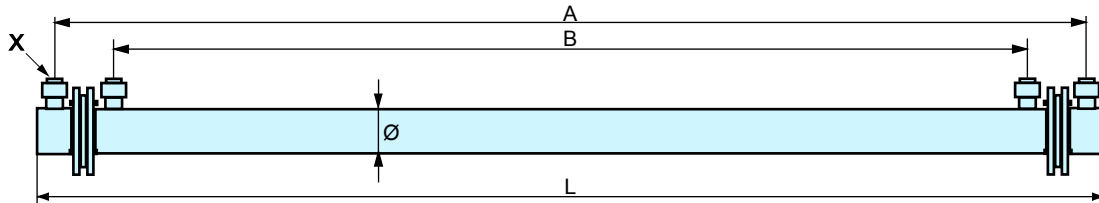

Type	Nom. vannmengde, m <sup>3</sup> /h	A	B	L	Ø	X	Vekt, kg tom/fyllt
Tx 90-2000	4,0	2200	1780	2280	90	25 <sup>a</sup>	9/19
Tx 90-3000	4,0	3200	2780	3280	90	25 <sup>a</sup>	12/27
Tx 110-3000	8,0	3200	2780	3280	110	32 <sup>a</sup>	19/42
Tx 125-3000	10,4	3200	2780	3280	125	40 <sup>a</sup>	24/50
Tx 140-3000	13,6	3200	2780	3280	140	50 <sup>a</sup>	31/68
Tx 140-4000	13,6	4200	3780	4290	140	50 <sup>a</sup>	39/89
Tx 160-3000	19,2	3200	2780	3300	160	DN 65 <sup>b</sup>	44/93
Tx 160-4000	19,2	4200	3780	4300	160	DN 65 <sup>b</sup>	54/119

Maks. trykk: 6 bar

<sup>a</sup> Hurtigkobling  
<sup>b</sup> Flens